


ハイリング寸法表

単位：mm

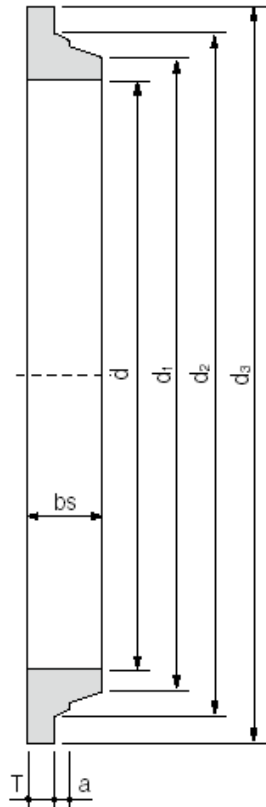

断面図

孔径 d	型式	適用ウェブ厚 範囲	鉄骨ウェブ 下孔径	ハイリング						
				bs	T	d ₁	d ₂	d ₃	a	質量 (kg)
φ100	100A	5.5-16.5	140	22	8.5	115	130	150	5.5	1.1
	100B	8.5-25	145	32	12	114	135	155	8.5	1.7
φ125	125A	5.5-16.5	165	25	10	139	155	175	5.5	1.4
	125B	8.5-25	175	32	14	145	165	185	8.5	2.5
φ150	150A	6-18	195	25	10	169	185	205	6	2.0
	150B	9-25	205	36	14	172	195	215	9	3.5
φ175	175A	6-18	225	25	10	199	215	235	6	2.6
	175B	9-25	230	36	18	200	220	240	9	4.5
φ200	200A	6-18	250	25	12	225	240	260	6	3.1
	200B	9-25	260	40	18	227	250	270	9	5.9
φ250	250A	6.5-19.5	300	28	12	273	290	310	6.5	4.1
	250B	10-25	320	45	22	286	310	330	10	9.9
φ300	300A	6.5-19.5	350	28	12	323	340	360	6.5	4.8
	300B	11-25	370	55	26	331	360	380	11	14
φ350	350A	6.5-19.5	400	32	14	371	390	410	6.5	6.3
	350B	11-25	425	60	28	384	415	435	11	19
φ400	400A	6.5-19.5	455	32	14	426	445	465	6.5	8.0
	400B	11-25	480	62	30	439	470	490	11	24
φ450	450A	10-25	525	50	22	487	515	535	10	19
	450B	14-25	550	74	38	505	540	560	14	41
φ500	500A	10-25	575	50	22	537	565	585	10	21
φ550	550A	10-25	630	55	22	589	620	640	10	27
φ600	600A	10-25	680	55	22	639	670	690	10	29